
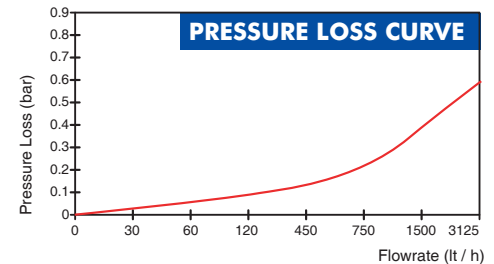


BAYLAN

WATER METERS

TY-1

Multi jet Wet type Water Meter

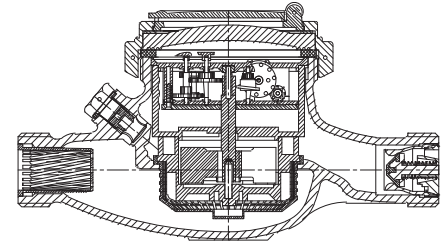

GENERAL

- MID Certified
- Available for optical reading
- Pulse output and AMR reading features are optional
- Multi jet working principle assures a long service time
- Suitable for potable water
- Low pressure loss, high sensitivity at initial flow
- Special glass with high resistance to pressure and impact
- 360° rotating lid • Double filter • Non return valve
- Electrostatic painted body made of corrosion resistant brass
- 3 years of warranty • Almost no maintenance
- Suitable for cold water up to 50°C
- Service and spare parts available for 10 years

CE

ISO 14001
ISO 27001
ISO 45001

TS EN ISO 4064
Muavenet
TS EN ISO/IEC 17020
AB-0068-M

Test
TS EN ISO/IEC 17025
AS-01723



ISO 9001
BUREAU VERITAS
Certification

PERFORMANCE DATA

Overload Flowrate	Q4	m ³ /h	3,125					
Permanent Flowrate	Q3	m ³ /h	2,5					
Transitional Flowrate	Q2	m ³ /h	0,025	0,02	0,016	0,160	0,1	0,05
Minimum Flowrate	Q1	m ³ /h	0,0156	0,0125	0,01	0,100	0,0625	0,03125
Q3/Q1 (MI-001 OIML R49)	-	-	160	200	250	25	40	80
Mounting on the network	-	-	H			V		
Maximum Registration Capacity	m ³	-	9999 / 99999 / 99999,99 / 99999,999					
Maximum Working Pressure	bar	-	16					
Maximum Working Temperature	°C	-	50					
Pressure Loss	bar	-	0,6					
Initial Flow	Qi	l/h	6					
Smallest Reading Resolution	m ³	-	0,00005					
Accuracy Class	-	-	Class 1/Class 2					
Unit weight	kg	-	1,12					
Package Weight (without connect)	kg	-	12,09					
Package Weight (with connect)	kg	-	13,89					
Quantity per package	-	-	10					
Package dimensions	cm	-	24,5x46,5x22,5					

DIMENSIONS

Nominal diameter	DN	20	mm
Connecting diameter	D	G 1	B
Total overall meter height	H	108	mm
Axis height	h	32	mm
Width	B	93	mm
Length	L	190	mm
Length with connections	LB	270	mm

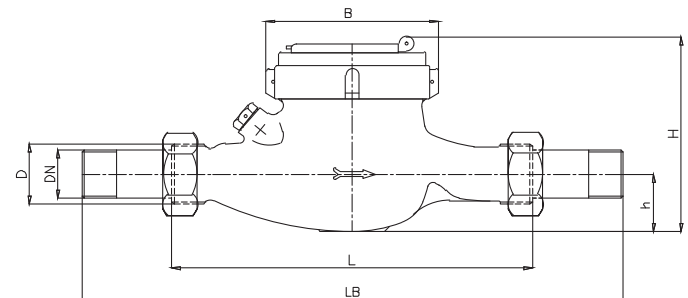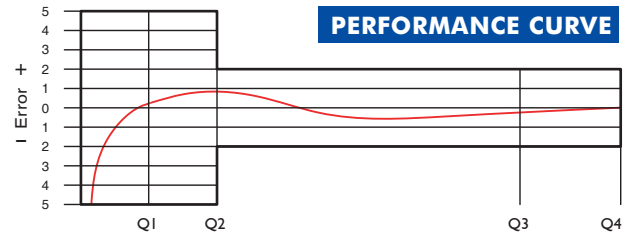

"Due to continuous development of our products, we reserve the right to modify our product design or construction without prior notice."