



REVISION HISTORY			
REV	DESCRIPTION	DATE	NAME
00			

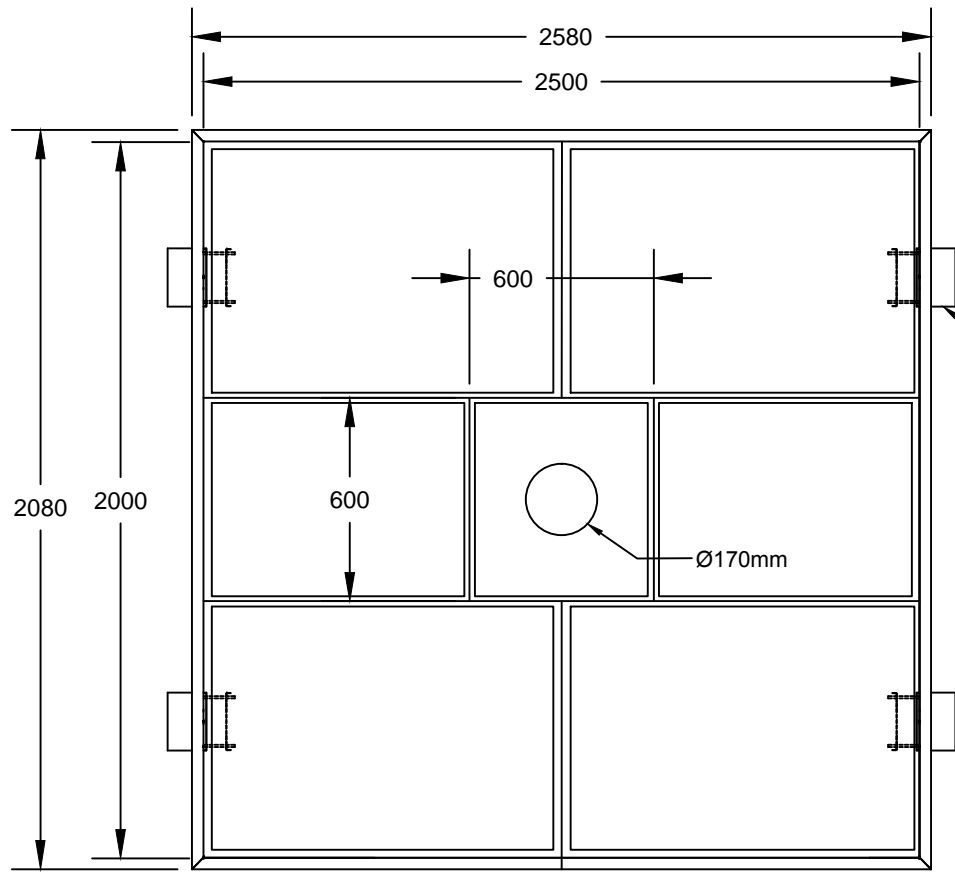

CR-II Arrangement

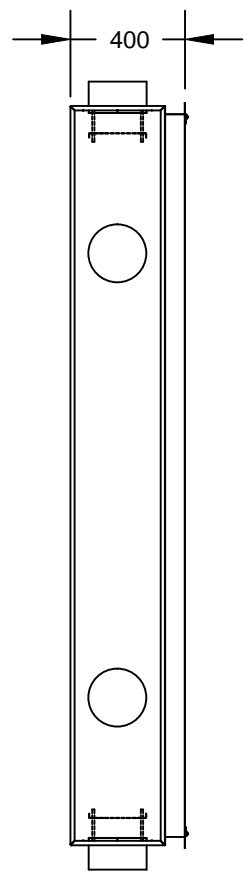

Side View

Filter Specs:

- AST II (Dry Seal)
- H14 Class
- Extruded Aluminium Frame
- Neoprene Gasket on air entering side
- Faceguard (GI powder coated) on both sides

Actual Size:

- 4 pcs x (660 x 1210 x 69mm)
- 2 pcs x (560 x 910 x 69mm)

Each Filter Module comes with GI Powder Coat, Perforated Diffuser and quarter-turn lock.


Accessories included:

- Sealants
- Filter Clamps
- Fastening (Bolts, nuts, washers, rivets)
- Turnbuckle



Note:

1. Lamp not provided.
2. Housing Module - Module GI powder coated RAL9010

Air flow : 6826 cmh with 0.45m/s

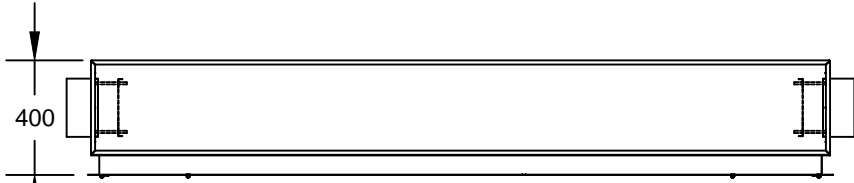

Front View

Part No:		Scale NTS	Drawn by Khairul	Checked by Soong	Approved by Sie Kee	Date 17/06/2020
GENERAL TOLERANCE REFER TO DOC. TD-F-01-001 UNLESS SPECIFIED		 AAF Manufacturing Sdn. Bhd. Shah Alam MALAYSIA www.aafasia.com		SHEET SIZE A3	Third Angle Projection 	GENERAL ARRANGMENT DRAWING CR-II MODULE 2000 x 2500 x 400mm
Dimension in mm [in]				DWG NO. DS-F-013-157-R00		Sheet 1 / 1