

SY-13·13SS

Features

1. Designed for large-diameter piping and lighter than cast iron strainer.

Specifications

Model		SY-13
Nominal size		200A-600A
Application		Steam, Air, Cold and hot water, Oil, Other non-dangerous fluids
Maximum pressure		1.0 MPa
Maximum temperature		220°C
Material	Body	Carbon steel pipes for pressure service and rolled steels for general structure
	Screen	Stainless steel
Screen	Perforation	ϕ 6-1.80 holes/cm ²
	Mesh	Standard 80 mesh
Connection		JIS 10K FF flanged



- Available with 20 to 100 mesh screen (perforation: ϕ 6.0-1.80 holes/cm²) or only perforation (ϕ 1.5-11.2 holes/cm²) on request.
- Available with rust-proof (hot-dip zinc coating).
- Available with stainless wetted parts (SY-13SS).
- Available with hinge attachment for screen cover.
- Available with JIS 20K flanged.

Dimensions (mm) and Weights (kg)


Nominal size	L	H ₁	ds	ls	Plug	Weight
200A	580	500	170	510	R 3/4	75
250A	680	565	220	570	R 3/4	115
300A	800	660	250	680	R 3/4	145
350A	930	745	300	776	R 3/4	210
400A	1000	845	340	876	R 3/4	270
450A	1080	890	400	926	R 3/4	400
500A	1200	1045	450	1100	R 1	460
550A	1300	1175	500	1250	R 1	625
600A	1500	1260	550	1340	R 1	820

Pressure Loss Chart (For Water)

- Screen: Perforation = ϕ 6-1.80 holes/cm², Mesh = 80 mesh

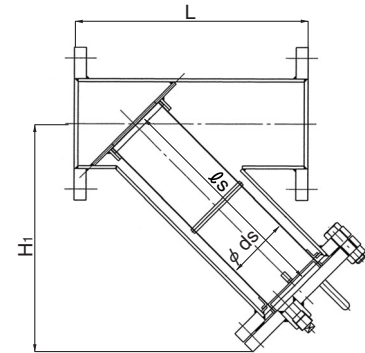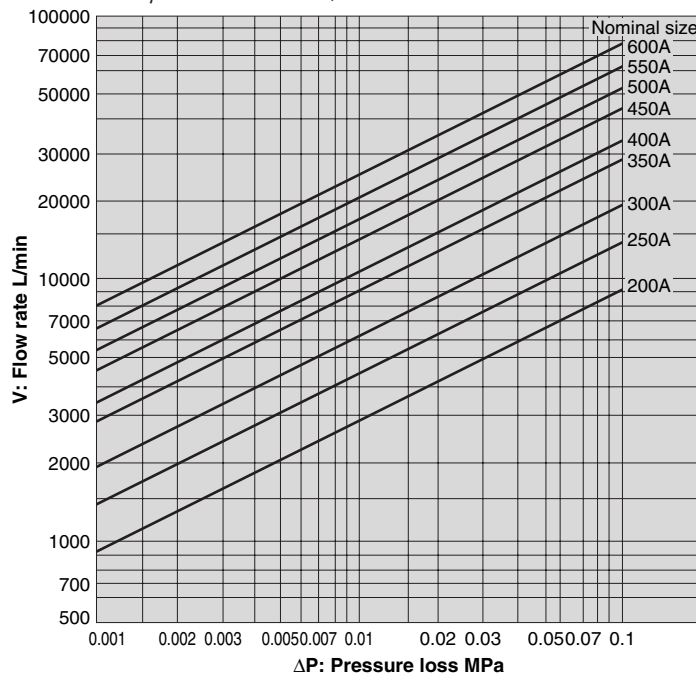

200A-250A

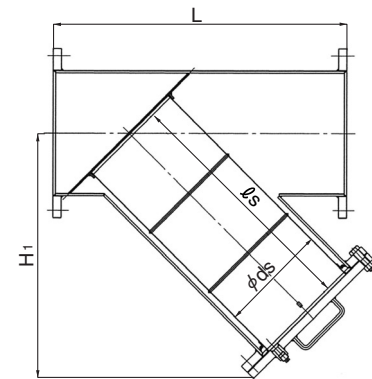

300A-600A